




SURFACE TREATMENT:

EITHER 4" LOAM BORROW OR TOPSOIL
OR
4" MIN.PAVEMENT MILLING MULCH PLACED
OVER GEOTEXTILE AND CRUSHED STONE
BOX

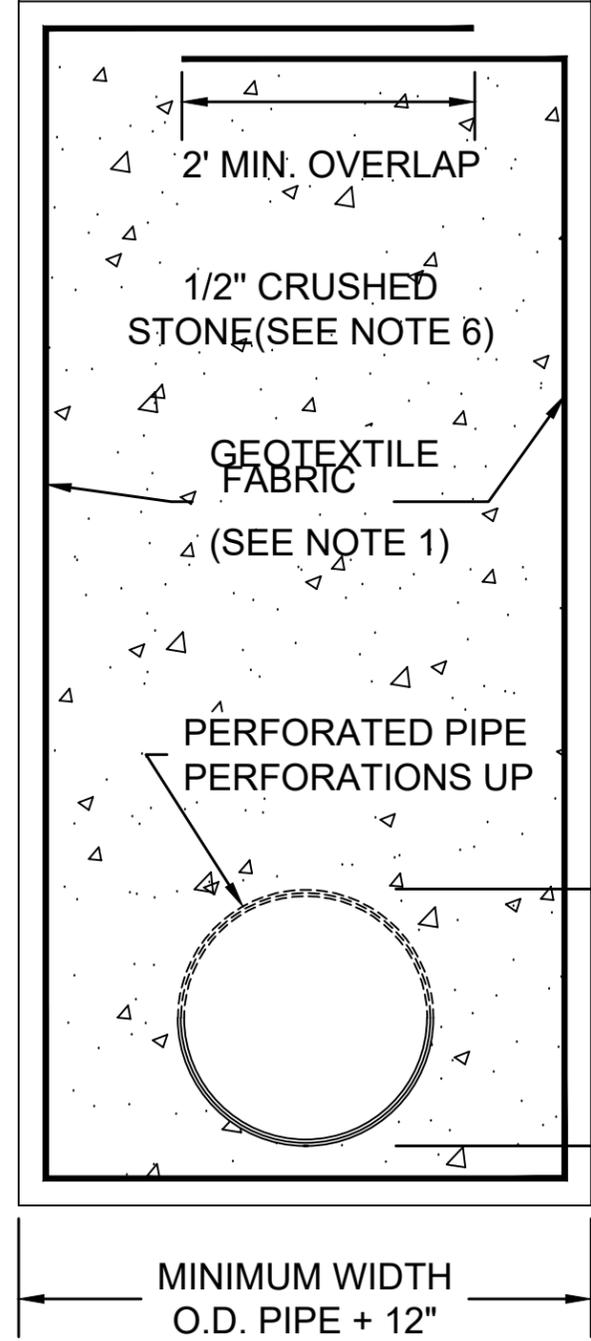

MINIMUM PLACEMENT DEPTH IS 4'-0"
OR WHERE SPECIAL BORROW IS
PLACED BELOW THE BOTTOM OF
SPECIAL BORROW OR GREATER DEPTH
IF REQUIRED BY FIELD CONDITIONS

PIPE
DIAMETER

2" FOR PERVIOUS BOTTOM

NOTES:

1. GEOTEXTILE FABRIC AS DESCRIBED IN SECTION M9.50.0
2. THE PIPE SHALL BE LAID AS PER MASSDOT SPECIFICATION SUBSECTION 260.61 AND 260.62.
3. SUBDRAIN LOCATED APPROXIMATELY AT INTERSECTION OF TANGENTS (SEE DWG. # 121.0.1.)
4. GRAVEL (AND SPECIAL BORROW WHERE REQUIRED) SHALL INTERSECT CRUSHED STONE FOR SUBDRAIN.
5. PIPE DIAMETER AS SHOWN ON CONSTRUCTION PLAN OR AS SPECIFIED BY ENGINEER.
6. CRUSHED STONE AS SPECIFIED ON MASSDOT SPECIFICATION M2.01.5.

MINIMUM WIDTH
O.D. PIPE + 12"