



ELEVATION VIEW
(CONSTRUCTION SIDE)
N.T.S.

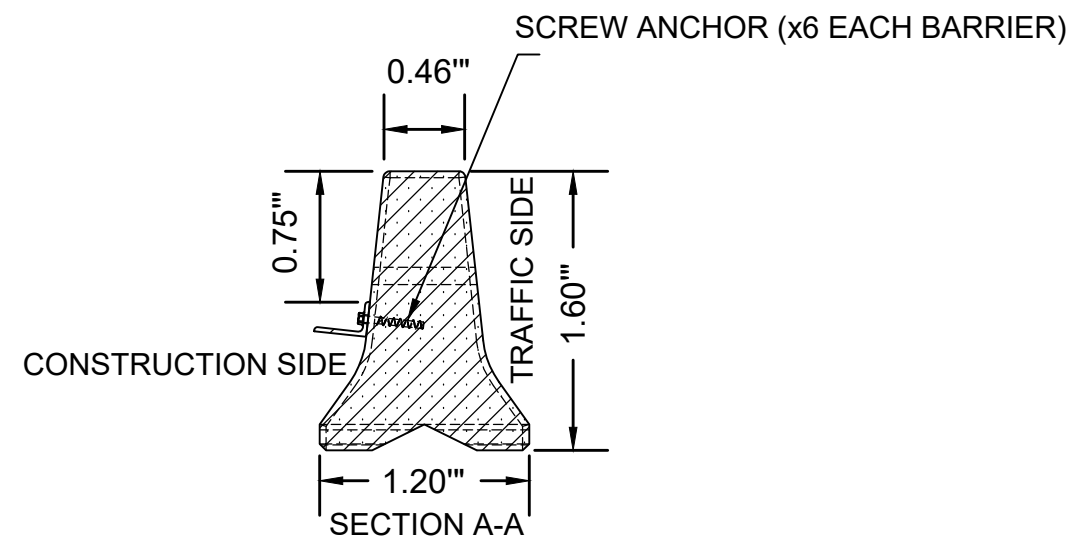

SCREW ANCHOR
 $\frac{3}{4}$ " X 7" SCREW ANCHOR WITH
FACTORED DESIGN STRENGTHS IN
4,000 PSI CONCRETE WITH A $6\frac{1}{4}$ "
EMBEDMENT AS FOLLOWS: A MINIMUM
11,820 LBS IN TENSION AND A MINIMUM
25,455 LBS IN SHEAR.

TEST RESULTS
MASH 3-11 ON CONCRETE:

1. INSTALLATION LENGTH: 20 SEGMENTS
2. DYNAMIC DEFLECTION AT BASE: 59.0"
3. PERMANENT DEFLECTION AT BASE: 59.0"
4. WORKING WIDTH: 81.4"

NOTES:

1. SEE MASSDOT DRAWING 853.2.2 FOR CONNECTION AND BARRIER DETAILS.
2. FOLLOW MANUFACTURER'S INSTRUCTION FOR INSTALLING SCREW ANCHORS.